


UPR Oil Catch Can Installation

2021-25 Ford F150 3.5L Ecoboost Dual Valve Catch Can (Does not fit Hybrid)

1. Remove the factory air filter box or cold air box inlet to gain access to the catch can mounting point. You will need an 8mm socket and a flat screwdriver or panel tool.




2. Locate the oval shaped hole in the frame on the driver side directly below the air inlet. Install the 90 degree mounting bracket to the frame with the supplied hardware. The bracket should be facing upwards as shown. Install the catch can onto the bracket with the supplied hardware.

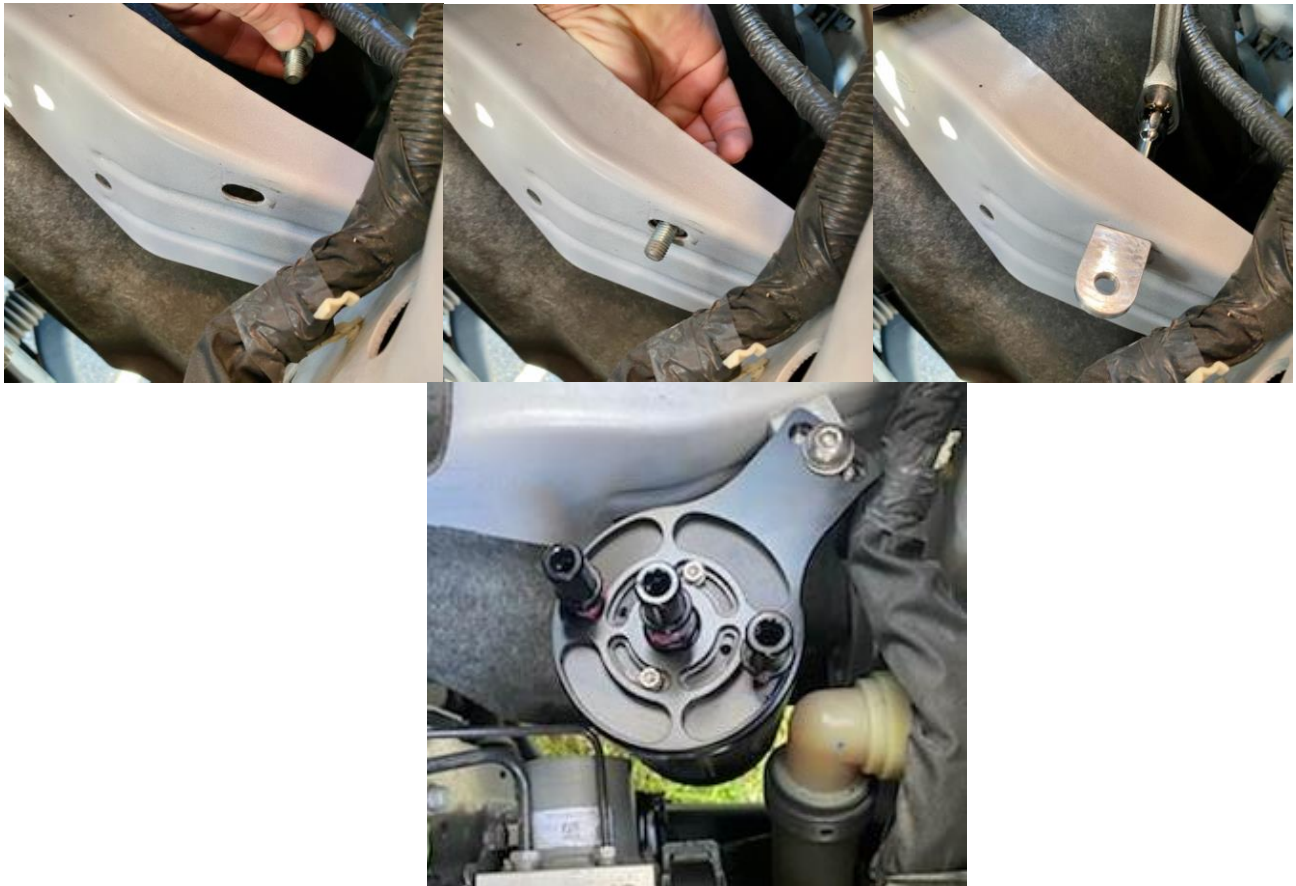

* *Optional 4" MEGA catch can shown, positioning for standard 3" can will be the same.*

Be sure to shop our online store for the best deals: www.uprproducts.com

5. Time to start routing hoses. Connect the hose with no check valve in it to the passenger valve cover PCV valve and route it to the catch can center inlet port. Be sure to route hoses so they will not contact any belts, pulleys or other hazards. Find the longest hose in the kit with a check valve in it. Route the hose so that the arrow printed on the check valve faces away from the catch can, towards the engine. Connect the hose to the intake manifold vacuum port, and the other end to the outlet port that is furthest forward on the catch can. Route the short hose towards the driver side of the engine.

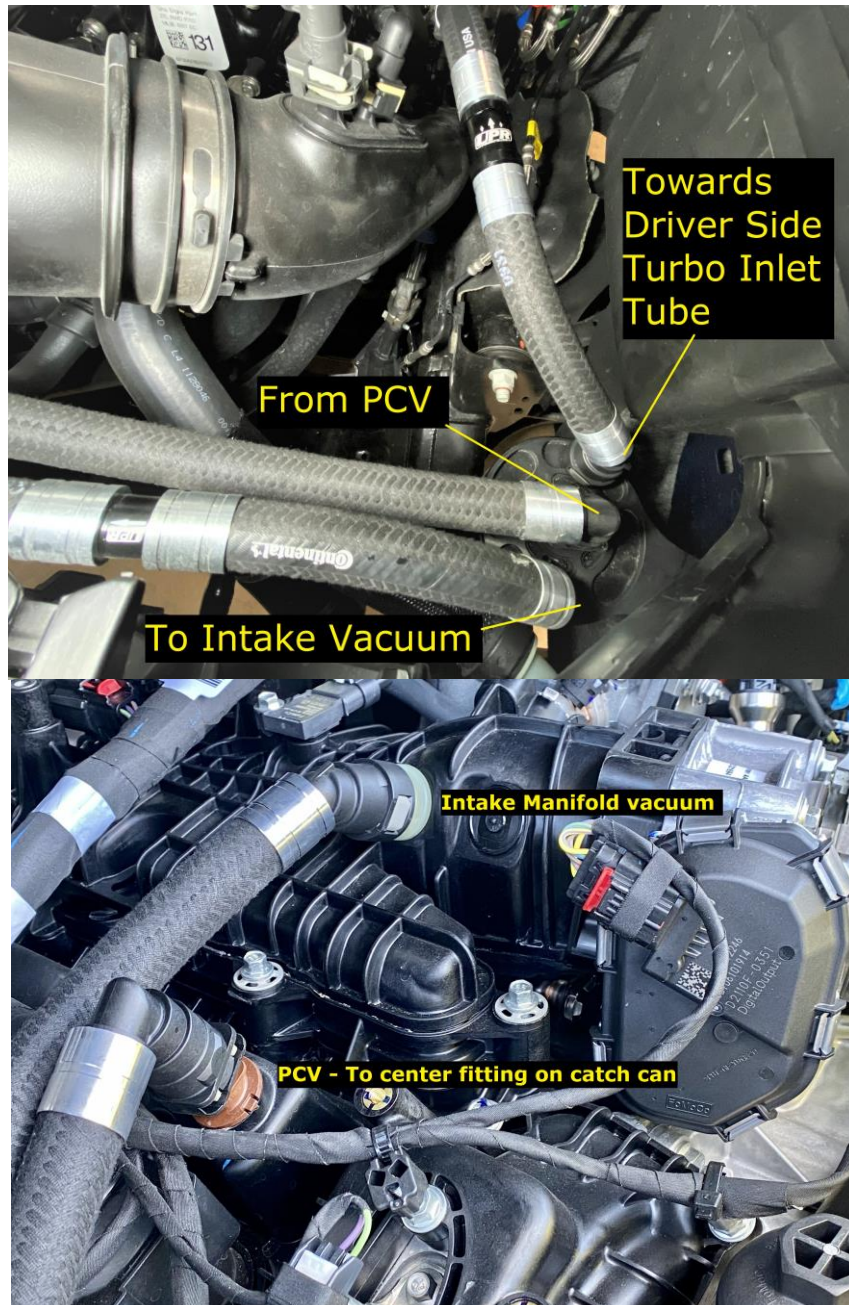




6. All 2024-up 3.5L Eco boost F150s we have seen no longer have the orange, non-quick release fitting on the driver side valve cover. (YAY!) If you have blue quick connect fittings, removing the driver side hose is as easy as the passenger side.

IF yours is an earlier build you may have the orange driver side CCV (Crankcase Vent) fitting. To install the Clean side separator, and WOT (Wide Open Throttle hose) you will need to remove these fittings.

You can use a 90 degree pick or hook pick to either disassemble the fitting or attempt to release the 3 tangs in the fitting, which is not easy. Most likely, you will break the orange fittings. That's ok, because UPR supplies replacement quick release fittings in the kit if you want to put your truck back to stock.

See below for instructions on how to remove the fittings, repair your factory CCV tube, and install the Clean Side separator and WOT fitting.

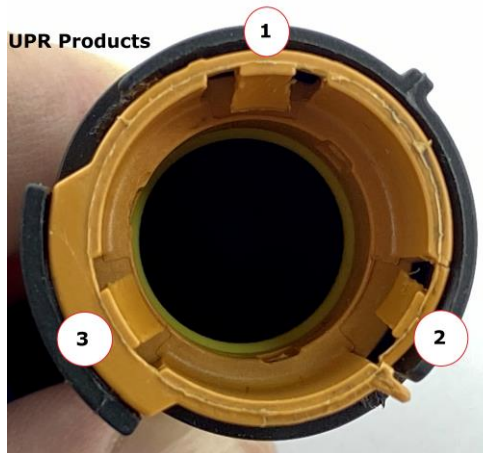

7. There are 3 little tabs securing the female end of the fitting onto the valve cover fitting. You can use a 90-degree pick or hook pick to release the fitting.


Be sure to shop our online store for the best deals: www.uprproducts.com



8. While holding the hose and pulling upward lightly, run the pick under the fitting to release all 3 tabs. If the fitting or tabs break, the fitting can be replaced with a standard UPR Plug and Play fittings P/N 2025-39 (straight), 2025-40 (90 degree) or 2025-41 (45 degree). Repeat the process to remove the fitting at the other end of the tube.




9. Another Method to remove the fitting is to separate the orange portion of the fitting from the outer cover. Using a pick or flat screwdriver, find the small orange 'window' on each side of the fitting. Slide the pick or screwdriver up between the black outer portion of the fitting and the orange inner portion. Pry up on each side to pop the outer portion off.

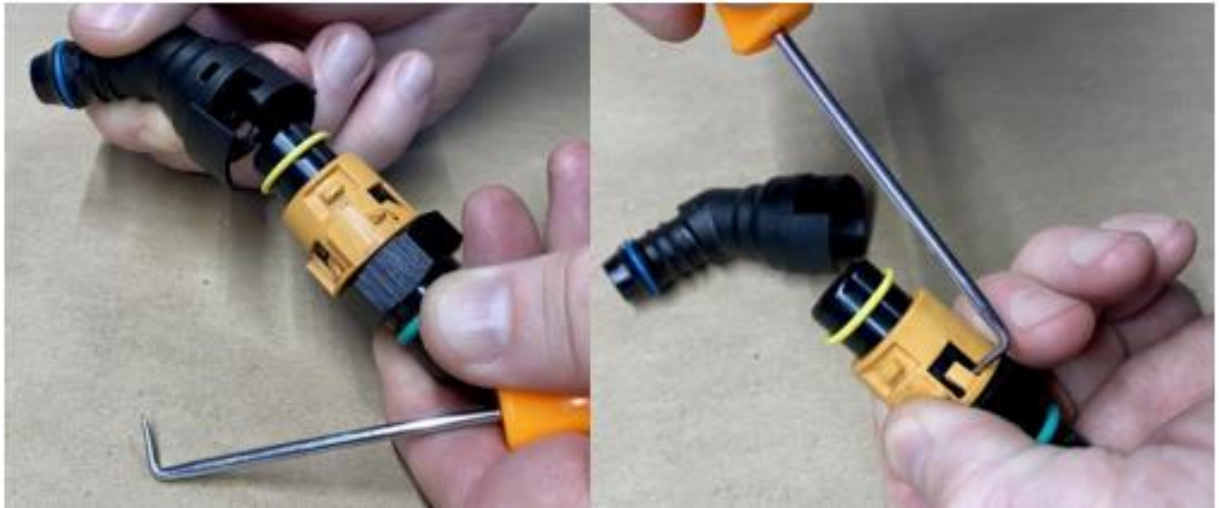


10. Now that you can see the 3 tangs, while applying upward pressure, use a pick or small screwdriver to release them.



11. To replace the fittings on your factory CCV tube, use a heat gun or lighter to gently warm the plastic tube – do not melt or burn the tube. Pull the fitting out of the tube once it is warm, (Be careful, it will be HOT) and insert the new fitting into the tube while it is still warm. The tube will conform to the fitting as it cools. To assist, you can wrap a small zip tie around the tube ends while it cools. This is only needed if you want to return your truck to stock.

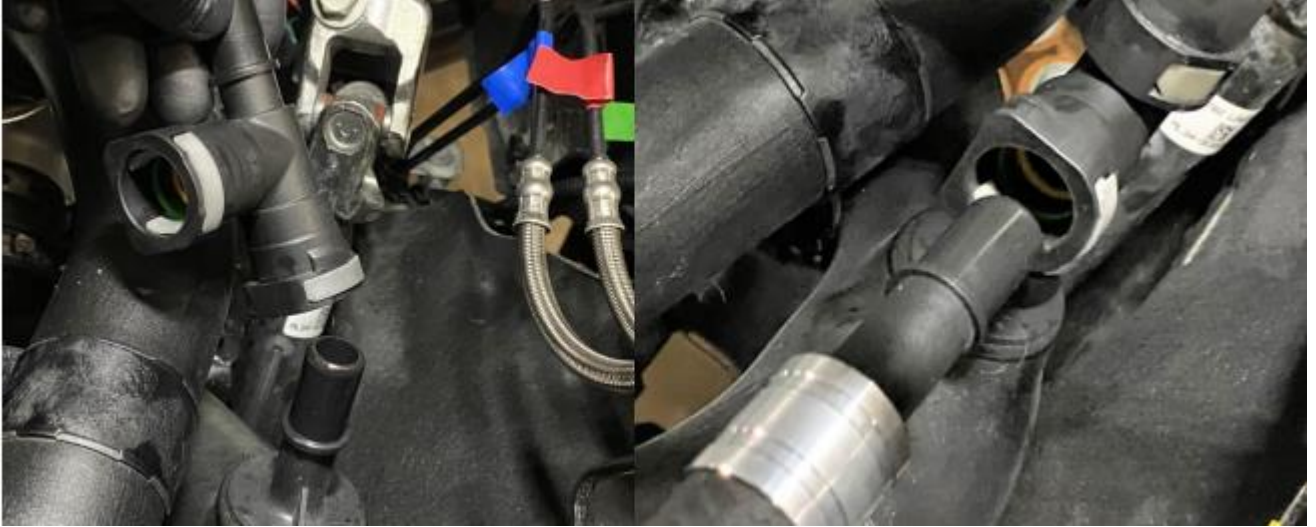

12. Install the 3-way Plug N Play Wide Open Throttle adapter fitting onto the driver side turbo inlet tube so that the female leg of the Tee is facing forward. Route the short hose (the Wide Open Throttle or WOT hose) from the catch can to the 3 way fitting. Connect the male fitting on the WOT hose from the catch can to the female fitting on the Tee.

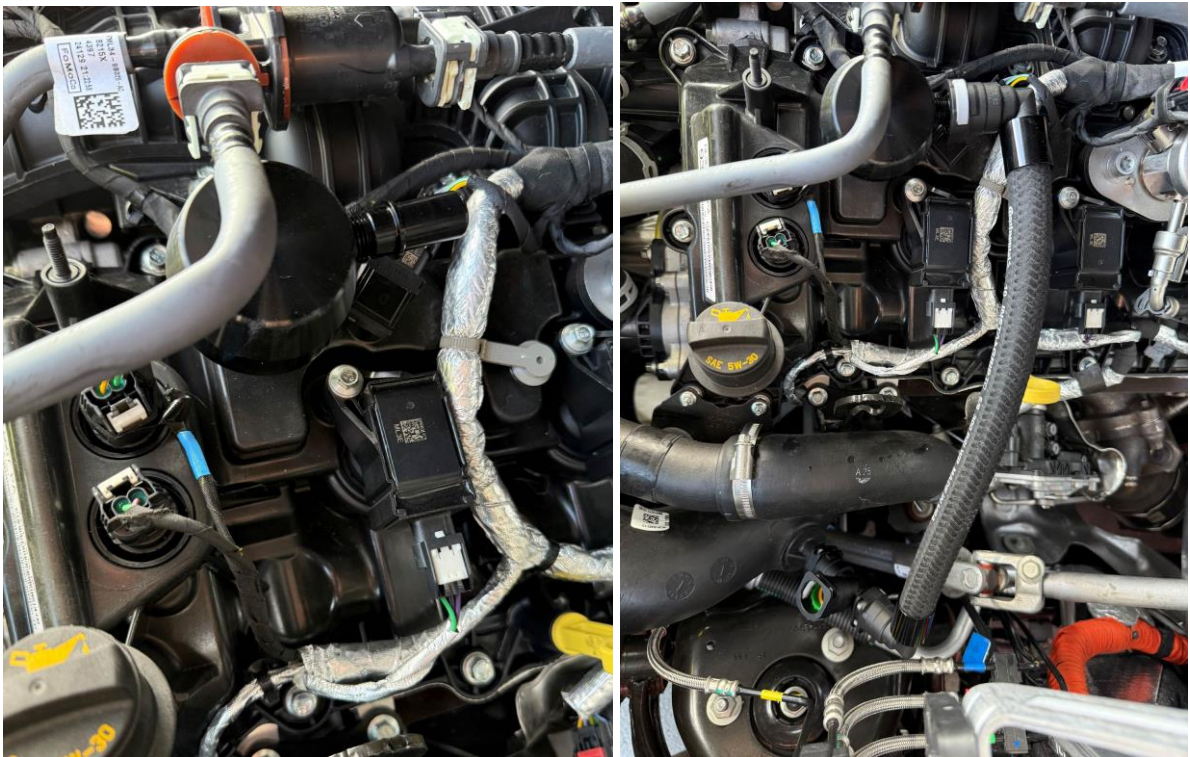

13. Install the CSS onto the driver side valve cover by lifting up on the collar, and pushing it onto the fitting until it clicks. The evap hose will be very close or may touch the CSS. This is normal. Install the CSS hose connecting the CSS to the 3 way fitting.



14. Secure the hoses to ensure they do not encounter any hazards like hot components, fans or belts. A good tip is to zip tie the vacuum hose along the coolant hoses on top of the intake manifold.



15. Reinstall the engine cover and tighten the 10mm nuts. Be sure the hoses clear the cover and do not interfere with other engine components.

. Product Liability Statement: The purchase of the product, manufactured by UPR Products Inc. completes an agreement between UPR Products Inc. and the customer. UPR Products Inc. assumes no liability for damages or injury incurred by the buyer of this product. The buyer has complete responsibility for the installation, use and upkeep of this product.

Always check and drain the catch can more often in winter / freezing weather. If the water/oil mixture in the catch can is allowed to freeze it will cause damage to the catch can and internal components. Any damage due to freezing is NOT WARRANTY. *The purchaser or user of this product is responsible for the proper disposal of any hazardous materials (oil catch can contents).* You must dispose of the liquid collected in the catch can properly (with used waste oil) according to your local laws.